

APPLICATION OF REVERSE ENGINEERING FOR GENERATING THREE DIMENSIONAL MODEL OF CASING FOR INDUSTRIAL PUMP

¹*Mr. Votarikari rajesh*,²*Mrs. Radha Aloori*,³*Mr. S Suresh* ¹²³*Assistant Professor Department Of Mechanical Engineering Kshatriya College of Engineering*

ABSTRACT

In the process of designing a product, reverse engineering is essential, especially when original documentation is absent. It centres on copying key characteristics from a current object to produce more accurate or improved virtual or physical representations. This frequently calls for the reproduction of a Computer-Aided Design (CAD) model using a variety of digitization processes, allowing for more analysis and product design advancements. The process includes a number of tasks, such as segmenting structures, characterization of geometric models, and creation of precise CAD models. Reverse engineering has numerous applications in industries including manufacturing, product design, and archaeology and has a significant impact on the transition from physical products to digital designs. The research paper dives into the fundamental ideas and methods guiding this procedure, with a focus on how 3D data is obtained using tools like coordinate measuring machines (CMMs) and laser scanning.

KEYWORDS: Reverse Engineering, Pump Casing, 3D Modelling, Scanning.

1. INTRODUCTION

Reverse engineering is the process of analyzing actual artifacts to create complete 2D or 3D documentation with enhanced precision thanks to contemporary technological breakthroughs like coordinate measuring and 3D scanning. It is crucial for scientific research and product geometry digitization, especially when 3D-CAD data is not available[1]. Engineering encompasses a wide range of tasks, including organizing, designing, producing, and measuring. Forward engineering and reverse engineering are its two main subcategories. While reverse engineering employs technology to examine existing product models and enable modifications or the production of similar ideas, forward engineering concentrates on turning abstract designs into working goods[2].

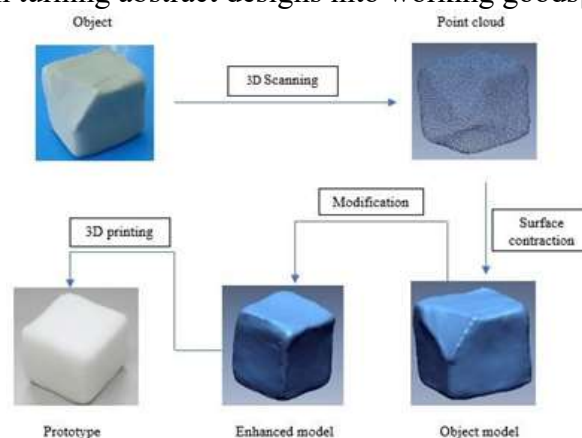


FIG.1.Conventionalreverseengineering[3]

Reverse engineering is difficult because physical components come in a variety of shapes and sizes, and as technology advances, these components become smaller and more intricate. The complexity and potential errors involved with a variety of complicated surfaces make traditional measurement and

manual inspection methods ineffective[4]. In an ideal world, reverse engineering wouldn't be necessary because of excellent design documentation. Adjustments are essential since in reality, many traditionally constructed systems have defects and require continual performance improvements. They usually have poor design, little documentation, and inaccurate or lacking design information, which makes this challenging[5]. The study of irregular particles is important in many disciplines since it has an effect on behavior and economics. These characteristics, such as size and shape, are used to analyze building materials, optimize space, and direct the design of concrete and asphalt. Engineers base their evaluations on factors including weight, volume, surface area, size, and shape[6].

Reverse engineering is incredibly helpful in redesigning, testing, and improving the structural integrity of watercraft components when combined with laser scanning technology and post-processing. Due to these components' complex and freeform forms, conventional measurement techniques have difficulty working with them. Seagoing watercraft designers can create precise 3D CAD models from scanned point cloud data, facilitating applications like CAE-based redesign, engineering, and simulation testing as well as quality evaluation in production[7].

2.METHODOLOGY

2.1 POINT DATA ACQUISITION TECHNIQUES

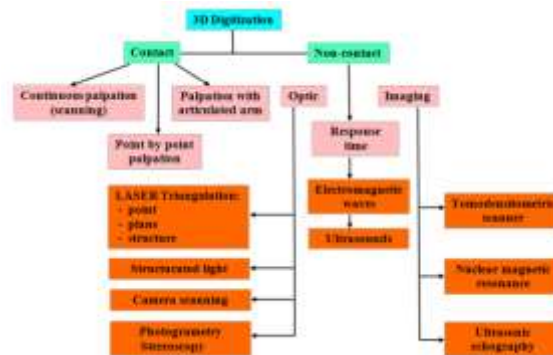


FIG.2. 3D digitizing technology[8]

In order to capture information for a 3D model, scanners in the late 20th and early 80s used contact probes that repeatedly physically touched the object. However, more efficient methods were later developed as a result of the inefficiency and time-consuming nature of the earlier ones. When compared to other reverse engineering techniques, 3D scanning has proven to be the best and most accurate way for data collection and 3D model building[9]. Virtual design, simulation, and reverse engineering have all undergone revolutionary changes in the last 20 years because of 3D scanning, or digitalization. It entails transforming the actual physical structure of an object into a digital "point cloud" containing XYZ coordinates, frequently processed into surfaces, and saved in CAD formats like STL. With applications in reverse engineering, quick prototyping, and product inspection, the method blends material-based acquisition employing probes and sensors with soft interface modeling using algorithms and is supported by 3D laser scanning for exact point collection[8].

Contact scanning-Contact-based 3D scanning uses probes attached to articulated arms or other instruments to collect data through direct physical contact and from a variety of angles. CMMs are frequently used for quality assurance following product fabrication and maintenance[10]. Traditional contact-based methods, which have been around for a while, involve making mechanical contact between surfaces and a measurement tool, usually a probe or stylus. These methods are more accurate and produce better surface finishes. But they are frequently time-consuming[11]. In particular for objects with relief characteristics and well-defined geometrical elements, contact-based 3D scanning offers outstanding precision. It works well for scanning big objects like machinery and airplanes, but it is inappropriate for soft materials and slow and incorrect on unidentified surfaces[12]. Contact scanning systems, functioning as independent units, excel at low probing forces for accuracy, particularly on delicate materials, and use extremely thin styli (0.3mm) to capture precise information. They have a magnetic stylus breakaway mechanism that ensures workpiece and stylus protection in the event of user setup mistakes, as well as silent, clean operation[13]. In order to collect surface data,

contact 3D scanning uses physical probe contact with an item to distort the probe. For quality control, systems like Coordinate Measuring Machines (CMMs) are frequently utilized, and this laser category excels in scanning reflective and transparent surfaces[9].

Non – contact scanning- Lidar or time-of-flight scanners use the known speed of light to calculate distances precisely by measuring the length of the laser's journey path. They use spinning mirror systems to scan larger regions, which enables them to scan huge objects, albeit at a slower processing rate[9]. There is no physical contact throughout this process[14]. Non-contact technologies, which can be active or passive, collect surface data using various active or passive mediums such as light, lasers, sound, magnetic fields, or X-rays. These methods are typically faster but have issues with transparent materials and small features[11]. Non-contact techniques are superior for quick and accurate Z-axis scanning (0.001mm or better), but they cannot scan reflective materials and are expensive to set up. They are appropriate for scanning soft materials but struggle with notches and steep surfaces because to reflections and susceptibility to airborne particles. Their X and Y-axis accuracy ranges from 0.035 to 0.060mm[12].

The following are a few common issues with useful data acquisition: (1) Reflective surface; (2) Occlusion; (3) Noise; (4) Missing or insufficient data; (5) Screening; and (6) Shading. When scanning an object with a highly **reflecting surface**, reflective surfaces provide the biggest problems. Having optical material is another cause of this problem. The constant coating of white spray is provided by a developer, which also reduces the shine[15]. **Occlusion** is the term used to describe the blockage of the scanning medium by an impediment or shadowing. The main scanners impacted by this problem include optical, acoustic, and magnetic scanners. One solution to this problem is to use numerous scanning equipment. Self-occlusion is a different kind of occlusion that arises from fixturing in which the geometry of the fixtures is included in the scan data. Fixture data elimination is complex and frequently necessitates many perspectives. During scanning, noise is captured. **Noise** is unwanted information, such as fittings, part-holding apparatuses, etc. We are having trouble with non-contact scanning because of this. Noise is decreased using various data fitting software[2]. Yet another significant issue when scanning dense material is **missing or inadequate data**. Sometimes scanning cannot identify threads, sharp edges, or hole depth due to the material's high density. This issue is fixed when the point cloud data has been processed. **Screening** occurs when a feature of the workpiece prevents the reflected light from reaching the receiver after a point has been illuminated by the transmitter. **Shading** occurs when a workpiece is located where the transmitted light cannot reach it but may be "seen" by the receiver. Spraying a diffuse reflecting substance on the work surface can solve the additional issues that light-based approaches confront when an item is fully or partially transparent[16].

Scanner Description- Scantech makes a portable, lightweight 3D scanner called the SIMSCAN. China-based Scantech is a maker of 3D scanners. With an outstanding acquisition speed of up to 2,800,000 points per second, this small handheld 3D scanner is quite fast. The SIMSCAN, which has been designated as metrology-grade, provides resolution and precision up to 0.020 mm, as well as volumetric accuracy up to 0.015 mm + 0.035 mm/m (or 0.015 mm + 0.015 mm/m when used in conjunction with the MSCAN-L15). It is among the lightest handheld laser 3D scanners in the world (203 x 80 x 44 mm), weighing only 570 grams as opposed to the typical 1 kilogram weight of this kind of item. The Scantech SIMSCAN, which promises to be able to scan a variety of items in a variety of real-world scenarios, takes 2,020,000 measurements per second utilizing blue laser lines or crosses over a 410 × 400 mm area. Depending on the project at hand, operators can utilize the device to capture small or huge objects by selecting hyperfine, ultrafast, or deep-hole scanning modes[16]. The non-contact gadget is a practical method for gathering 3D data[17].



FIG.3. Simscan and FARO Platinum Arm with Laserscan Arm [16], [18]

A multinational manufacturer based in the United States named FARO produces the Faro Arm product line, which includes the FARO Edge, a metrology industrial 3D scanner. Laser triangulation is the foundation of the Faro arm. With this scanner, we can achieve precision of up to 0.025mm. 560,000 points are acquired each second at the point level. The calibration process for the scan system entails calibrating both the camera and the projector in the correct order so that the calibrated camera can be used to calibrate the projector [19]. This scanner's operational range is 0.115 to 0.230 meters [16]. With regard to data acquisition time, the Faro scanner is quicker [20]. The scanner weighs roughly 11 kg. Different programs, like Geomagic and Polyworks Inspector, handle point data [16].

2.2 MERGING PROCEDURE OF SCANED DATA:-

The process of merging involves combining all of the settings utilized for scanning. All of the data are call-in software such as Poly Works, Geomagic Control, etc. during the merging process. We need to integrate all the data because different configurations are associated with different product characteristics. To do this, we utilize this program, in which all the setups are called and combined. After merging all the data, we have one complete product from which to start building a 3D CAD model.



FIG.4. Two different setups for merging

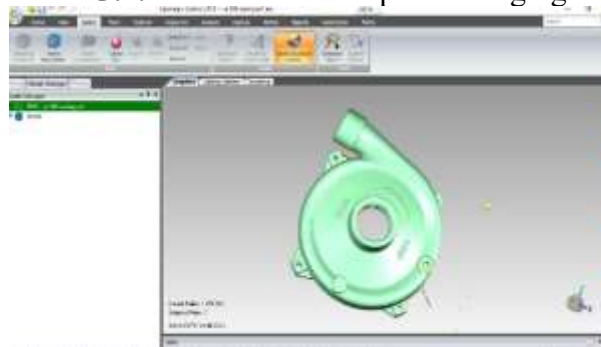


FIG.5. After merging all the setups

After the rotary measuring location has been set, the first sequence of measurements will start. After the second measurement in the initial measurement sequence, both scanned images will then appear for data alignment. In order for the subsequent measurements to be automatically aligned by the software, one must here choose a shared reference point that spans both scanned images. Once all the measurement sequence data have been recorded, these surfaces must be integrated by choosing a common reference point and aligning the measurement sequence[15].

Fig. 5 displays the object's whole scanned surface. Triangle mesh (mesh building, mesh editing, edit holes), global optimization, and selection can all be used to alter the data that comes from measurements. Depending on the application area, the four optimization methods for creating the triangle mesh are quality control, design, and reverse engineering. It's crucial to manage noise appropriately in various 3D operations to prevent distorted representation. However, the chosen scanner has an impact on noise characterization[21]. Alignment indicators are still discernible in an unoptimized triangle mesh. By filling in the gaps left by removing a section of the triangle mesh at the marker points, the stamp out/fill markers operation produces a smooth surface in those areas. Use the Smoothing and Sharpening Meshes option to sharpen the edges and smooth the mesh.



FIG.6.STL file format

STL file format is used for additional modelling. As illustrated in Fig. 6, the STL file is loaded into Siemens NX (CAD modelling software) to convert the point clouds' data into a 3D surface model. NX can also be used to dimension the model, as seen in Fig. 7.

An automated method of turning a physical thing into a three-dimensional (3D) surface representation or solid model is desired for use in industrial and commercial enterprises. Specific features are offered by a variety of commercial CAD-related programs to assist traditional RE. The active CAD file types include DXF, STEP, IGES, STL, and others[22].To ensure that the CAD model is under prescribed data, it is crucial to create 3D models from STL files. In order to determine the dimensions of the cad model and make any necessary modifications, we must compare the 3D model we just built to STL once more.The model is also provided certain clearly specified dimensions, allowing for adjustments to be made while creating the cad model. In this stage, several threads are provided, and the size of the holes is changed correspondingly.



FIG.7. CAD model from STL

3. CONCLUSION

Modern manufacturing and quality control utilize 3D scanners in a variety of ways. This essay has explained scanning using the inspection of an industrial PUMP CASING as an example. A industrial PUMP CASING has very complex geometry both inside and outside the body, therefore scanning with a SIMSCAN and FARO ARM scanner with a rotary table necessitates specific types of fasteners for fixing the body at an angle. To effectively measure bright or polished surfaces during scanning, one must clean the surfaces or spray surface developer on them. Due of the 3D scanner's sensitivity to temperature changes, it should always be kept at room temperature. As the temperature of the sensor rises, the measurement will be interrupted. Overall, the 3D Scanner has gained a lot of popularity because of its quick measurement, high accuracy, clear data, and simplicity of use.

REFERENCES

- [1] M. Boryga and P. Kołodziej, "Reverse Engineering in Modelling Agricultural Products," *Agricultural Engineering*, vol. 26, no. 1, pp. 105–117, Jan. 2022, doi: 10.2478/agriceng-2022-0009.
- [2] S. V.Trivedi, "Review of Reverse Engineering as a Generic Concept" *Proceedings of National Conference on Innovative & Emerging Technologies*, ISBN 978-81-925650-0-2, Gujarat Technological University & Smt. S. R. Patel Engineering Collage, 2013, pp. 163-169.
- [3] K. Saiga, A. S. Ullah, A. Kubo, and Tashi, "A Sustainable Reverse Engineering Process," in *Procedia CIRP*, Elsevier B.V., 2021, pp. 517–522. doi: 10.1016/j.procir.2021.01.144.
- [4] T. Shivshankar, P. Chinmay, and P. Pradeep, "3D Scanning: A New Approach Towards Model Development In Advanced Manufacturing System," *International Journal of Innovative Research in Science, Engineering and Technology*, Volume-2, Issue 8, Issn: 2319-8753, August 2013.
- [5] R. Singh and A. Prof, "A Review of Reverse Engineering Theories and Tools," *International Journal of Engineering Science Invention*, Volume 2 Issue 1, Janurary-2013.
- [6] D. Asahinaand M. A. Taylor, "Geometry of Irregular Particles: Direct Surface Measurements by 3-D Laser Scanner," *Powder Technology*, vol. 213, no. 1, pp. 70–78, Nov. 2011, doi: 10.1016/j.powtec.2011.07.008.
- [7] M. Deja, M. Dobrzyński, and M. Rymkiewicz, "Application of Reverse Engineering Technology in Part Design for Shipbuilding Industry," *Polish Maritime Research*, vol. 26, no. 2, pp. 126–133, Jun. 2019, doi: 10.2478/pomr-2019-0032.
- [8] A. C. Voicu, I. G. Gheorghe, L. L. Badita, and A. Cirstoiu, "3D Measuring of Complex Automotive Parts by Multiple Laser Scanning," *Applied Mechanics and Materials*, 2013, pp. 519–523. doi: 10.4028/www.scientific.net/AMM.371.519.
- [9] V. N. Chougule, H. S. Gosavi, M. M. Dharwadkar, and A. A. Gaind, "Review of Different 3D Scanners and Scanning Techniques," *IOSR Journal of Engineering (IOSRJEN)*, ISSN(e): 2250-3021, ISSN(p): 2278-8719, pp.41-44.
- [10] KESERIC Milijana, "REVSERSE ENGINEERING IN MECHANICAL". Bachelor's Thesis Lapland University of Applied Science, Mechanical Engineering, 2022.
- [11] Z. Geng and B. Bidanda, "Review of Reverse Engineering Systems – Current State of The Art", *Virtual and Physical Prototyping*, vol. 12, no. 2. Taylor and Francis Ltd., pp. 161–172, Apr. 03, 2017. doi: 10.1080/17452759.2017.1302787.
- [12] A. Kumar, P. K. Jain, and P. M. Pathak, "Reverse Engineering in Product Manufacturing: An Overview," *DAAM International Scientific Book*, 2013, pp. 665–678. doi: 10.2507/daam.scibook.2013.39.
- [13] S. Desai and BopayaBidanda, "Chapter 5 Reverse Engineering: A Review & Evaluation of Contact Based Systems." *Department of Industrial Engineering*, PA 15261.
- [14] R. H. Helle and H. G. Lemu, "A Case Study on Use of 3D Scanning for Reverse Engineering and Quality Control", *Materials Today: Proceedings*, Elsevier Ltd., 2021, pp. 5255–5262. doi: 10.1016/j.matpr.2021.01.828.
- [15] A. Haleem, P. Gupta, S. Bahl, M. Javaid, and L. Kumar, "3D Scanning of A Carburetor Body Using COMET 3D Scanner Supported by COLIN 3D Software: Issues and Solutions," *Materials Today: Proceedings*, Elsevier Ltd., 2020, pp. 331–337. doi: 10.1016/j.matpr.2020.07.427.

- [16] S. A. Gandhi, S. V. Trivedi, D. S. Patel, and M. J. Pandya, "Design Modification of Feed Roll Assembly Using Reverse Engineering", *Design Engineering*, Issue 1, pp. 4764-4771.
- [17] PRAKASH, V. V., & KUMAR, B. S. IMPROVING ORC PLANT EFFICIENCY BY COMBUSTION PROCESS.
- [18] M. Dúbravčík and Š. Kender, "Application of Reverse Engineering Techniques in Mechanics System Services", *Procedia Engineering*, Elsevier Ltd, 2012, pp. 96–104. doi: 10.1016/j.proeng.2012.09.491.
- [19] Kumar, A. K. A managerial approach towards reliable maintenance of high productive machine.
- [20] PRAKASH, V. V., & KUMAR, B. S. IMPROVING ORC PLANT EFFICIENCY BY COMBUSTION PROCESS.
- [21] S. Gauthier, W. Puech, R. Bénére, and G. Subsol, "Analysis of Digitized 3D Mesh Curvature Histograms for Reverse Engineering," *ComputInd*, vol. 92–93, pp. 67–83, Nov. 2017, doi: 10.1016/j.compind.2017.06.008.
- [22] Prakash, Vodnala Veda, and S. Chakradhara Goud. "A Schematic Design and an NDT Approach for a Radiator Tubes Using Nano fluids."